

KERALINE

Ceramic Backings

Features


Our new range of ceramic backings enables you to build a much more efficient weld root:

- without gouging,
- without grinding,
- without re-welding,
- without rework,
- with a wide root gap,
- with a bigger root thickness permits higher welding current for the hotpass.

The use of the ceramic backings enables welding with higher intensity.

The quality of the weld bead will be improved:

- higher penetration,
- minimum risk of lack of fusion,
- Smooth profile of the root pass.

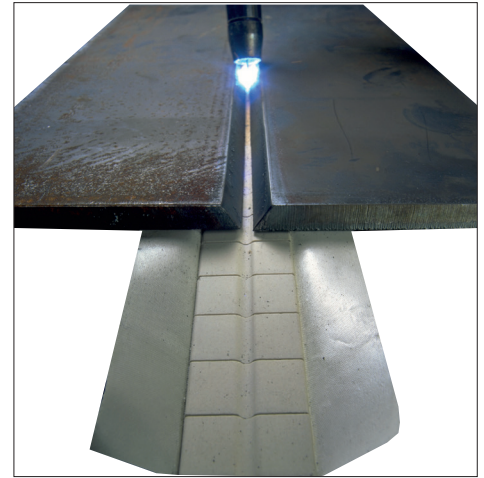

Type	To order	PROCESS				Dimensions (mm)	3D diagram	Application	Packing
		MMA	TIG	MIG/MAG	SAW				
KERALINE TA1 - 6 mm	W000010391	-	√	√	-			600 mm / piece 10 pieces per bag (6 meters) 6 bags/carton (36 meters)	
KERALINE TA2 - 9 mm	W000010392	-	√	√	-				
KERALINE TA3 - 13 mm	W000010393	√	-	√	-				
KERALINE TF1 - 6 mm	W000010394	-	√	√	-			600 mm / piece 50 pieces per bag (30 meters) 5 bags/carton (150 meters)	
KERALINE TF2 - 9 mm	W000010395	-	√	√	-				
KERALINE TF3 - 13 mm	W000010396	√	-	√	-				
KERALINE TR1 - 6 mm	W000010397	√	-	√	-			600 mm / piece 20 pieces per bag (12 meters) 8 bags/carton (96 meters)	
KERALINE TR2 - 7 mm	W000010398	√	-	√	-				
KERALINE TR3 - 8 mm	W000010399	√	-	√	-				
KERALINE TR4 - 9 mm	W000010400	√	-	√	-				
KERALINE TR5 - 12 mm	W000010401	√	-	√	-				
KERALINE TR6 - 15 mm	W000010402	√	-	√	-				